


ROSCO COLOR FILTER TECHNICAL DATA SHEET

SWATCHBOOK: SUPERGEL
COLOR FILTER: #26 LT RED
DESCRIPTION: Color Effects Lighting Filter.
TRANSMISSION = 12% or -3.1 stop loss
MIREL SHIFT = Not Applicable.
CC EQUIVALENT = Not Applicable.

COLORIMETRIC DATA

OBSERVER: CIE 1964 10° R:
SOURCE:

- 'A' (tungsten) G:
- 'D65' (daylight) B:

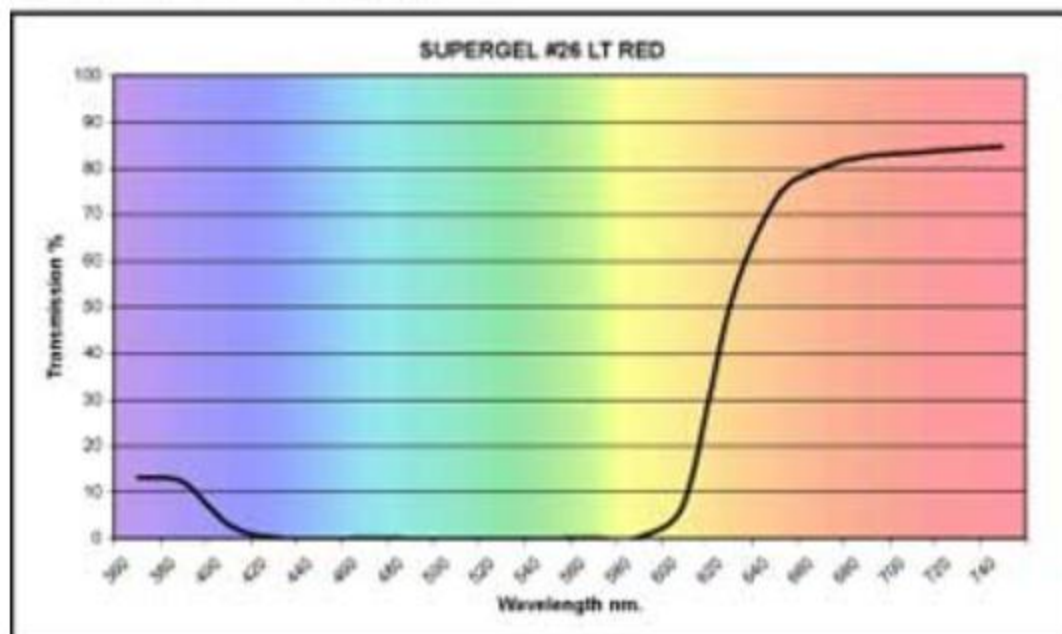


HUNTER LAB SOURCE A	
L*	41.288
A*	64.960
B*	69.847

HUNTER LAB SOURCE D65	
L*	31.059
A*	65.962
B*	51.822

CIE 1964 SOURCE A	
Y	12.046
(x)	0.687
(y)	0.310

CIE 1964 SOURCE D65	
Y	6.677
(x)	0.678
(y)	0.307

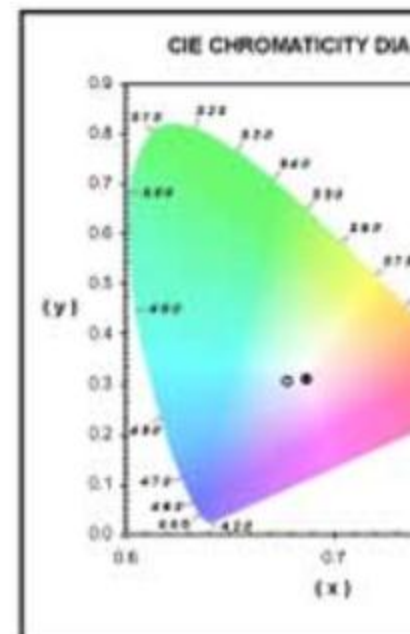

nm.	360	380	400	420	440	460	480	500	520	540	560	580	600	620	640	660	680	700
trans %	13	12	3	0	0	0	0	0	0	0	0	0	8	50	73	80	65	04

MATERIAL SPECIFICATIONS:

General Description: Co-extruded Polycarbonate Film
Substrate: PC (Polycarbonate)
Thickness: 3.0 mil (.003" or 76.2 micron)

Manufactured in: U.S.A.

AVAILABLE SIZES:

- ✓ 20 in. x 24 in. sheets (50cm x 60cm)
- 21 in. x 24 in. sheets (53 x 60cm)
- ✓ 24 in. x 25 ft. rolls (60cm x 7.62m)
- 48 in. x 25 ft. rolls (121cm x 7.62m)
- 60 in. x 20 ft. rolls (152.4cm x 6.10m)
- 13.5 in. Diameter Glass (34.3cm) - Cut to order