

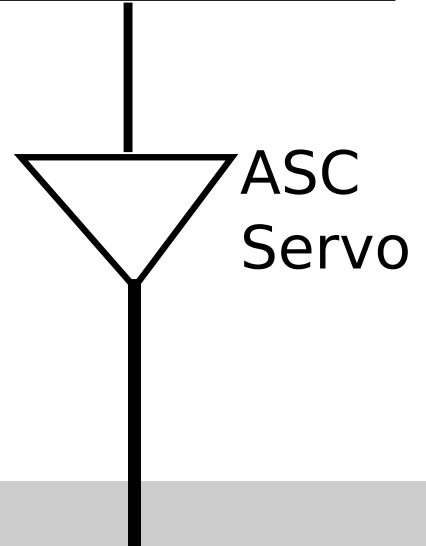


Y-ENDTABLE

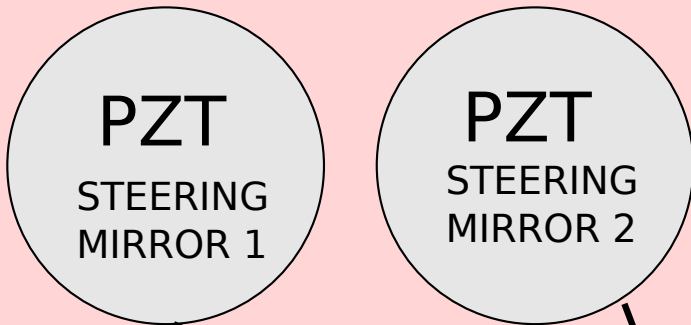


1Y4

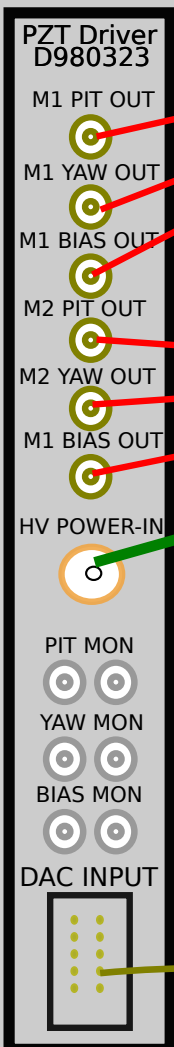


RG316 LOW NOISE SMB-FEMALE TO LEMO FEMALE CABLES

CUSTOM RIBBON-25-pin SUB D (on AI board) to 20-pin IDC (into DAC interface)



RG316 LOW NOISE SMA-MALE TO POWER SUPPLY CABLE

Test-points for monitoring

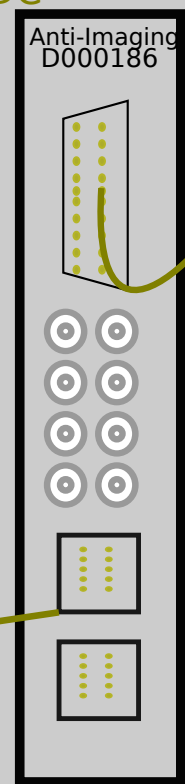

CUSTOM RIBBON-10-pin IDC on AI board to 10-pin IDC on driver board