After getting some feedback from Chandra, we agree to revise the documents D1900114 and D1900116. This revision is to allocate the air purge valve on the other side of the chamber, now changing the valve from D6 Flange to D2 Flange. The documents are being modified by Don.

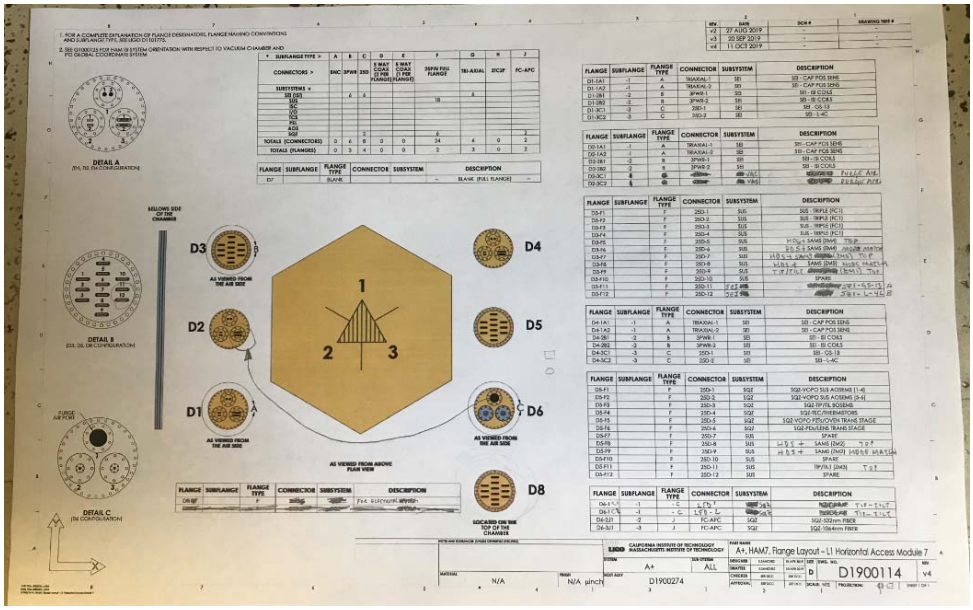

As seen in this image, we are also adding the HDS name for the suspension: HDS + SAMS.
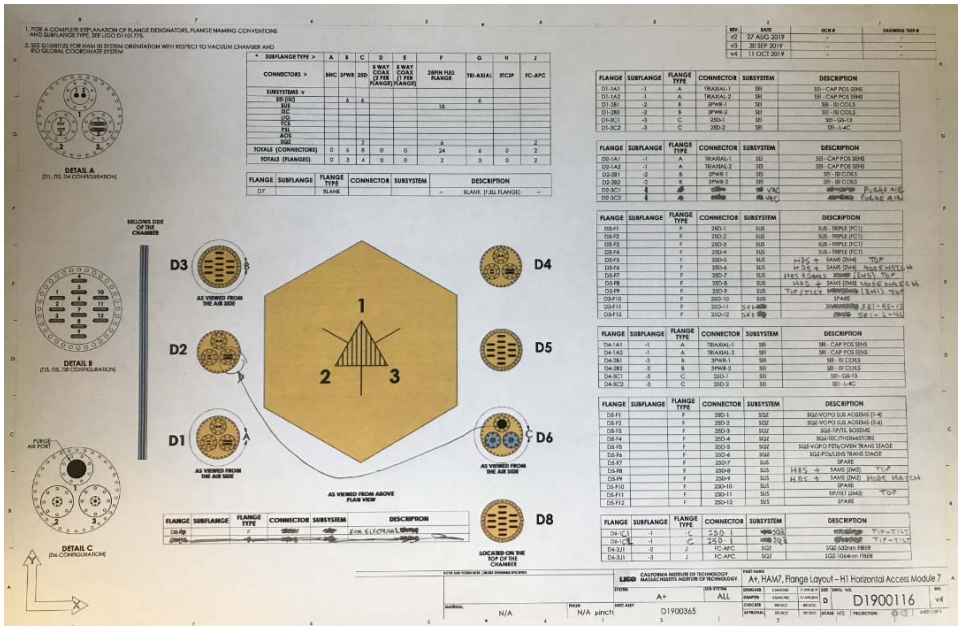
The seismic db25 connectors are being allocated to D3 Flange at D3-F11 and D3-F12. The same modifications are being made to document D1900116.